



DATA SHEET

SX LED II

IP 67

Colour	Product No.
Stainless steel	1545191
Gold	1545192



Product No.	Power	lm	K	CRI	IP	Size
1545191	2 x1 W / 350 mA	2 x 39	3000	> 85	67	H 90 x W 45 x D 24 mm
1545192	2 x1 W / 350 mA	2 x 39	3000	> 85	67	H 90 x W 45 x D 24 mm

NB ! Equipped with two 5 m connection cables.

RECOMMENDED TRANSFORMER SETS:

Transformer	Product No.	Dimmer	Min lamps	Max lamps
Osram OTe 13/220-240/350 PC	1532283	*	3	4
Osram OTe 18/220-240/350 PC	1532284	*	5	8
Osram OTe 20/220-240/350 PC	1532266	*	8	9
Osram OT 9/220-240/350 DIM	1532268	1 - 10 V	1	3

* Leading and Trailing Edge Dimmer

Cariitti Oy
www.cariitti.com


Munkinmäentie 9
02400 Kirkkonummi
Finland

Subject to change.




IP67


1

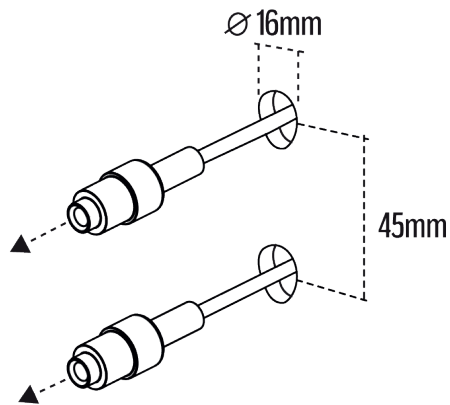

2

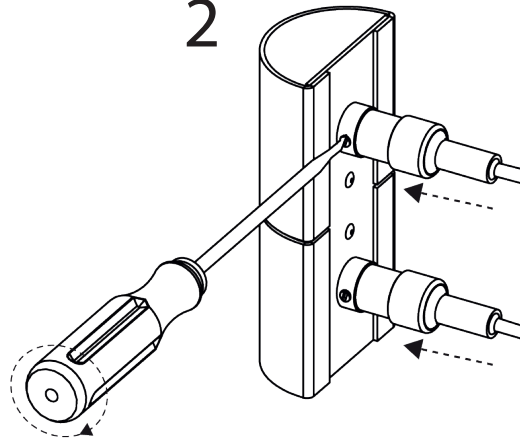


3

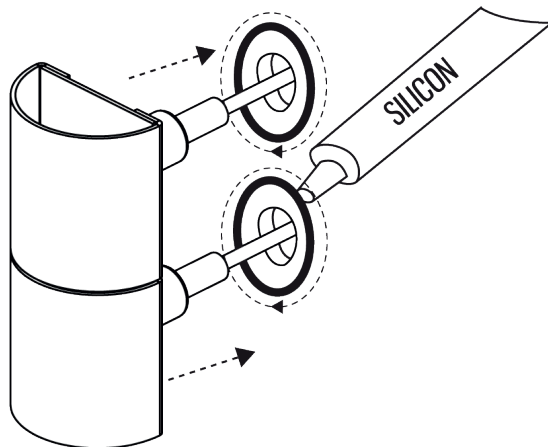

OK

NB! Equipped with two 5 m connection cables.


MAINS DIMMABLE

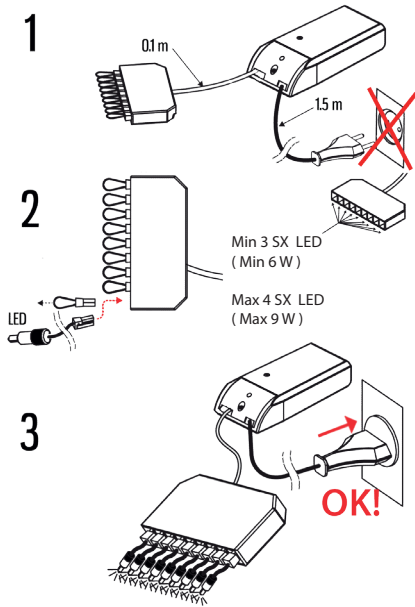

Ambient temperature 0°C ... + 45°C

1532283


MAINS DIMMABLE

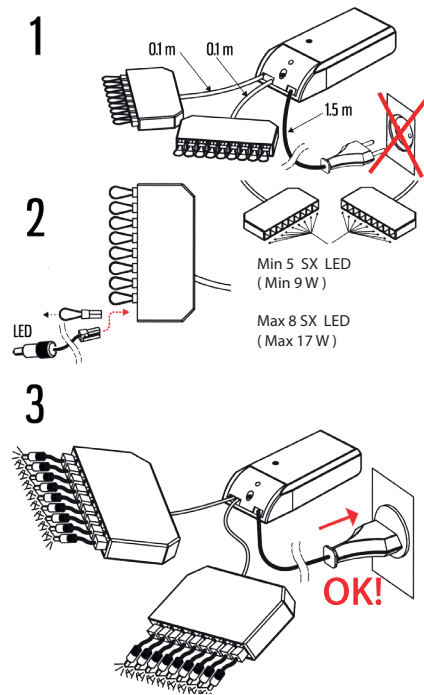

Ambient temperature 0°C ... + 45°C

1532284


MAINS DIMMABLE

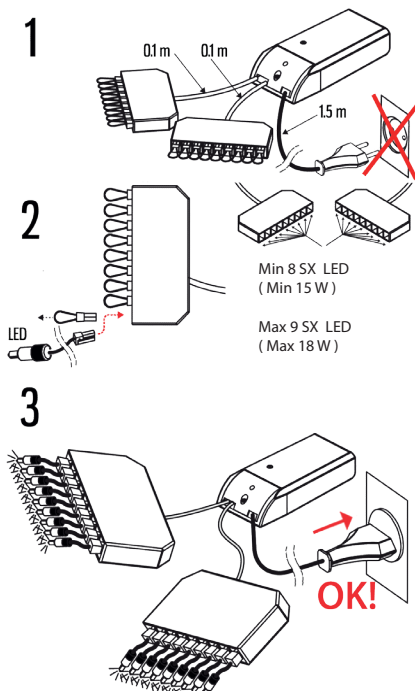

Ambient temperature 0°C ... + 45°C

1532266

DIM 1 - 10V

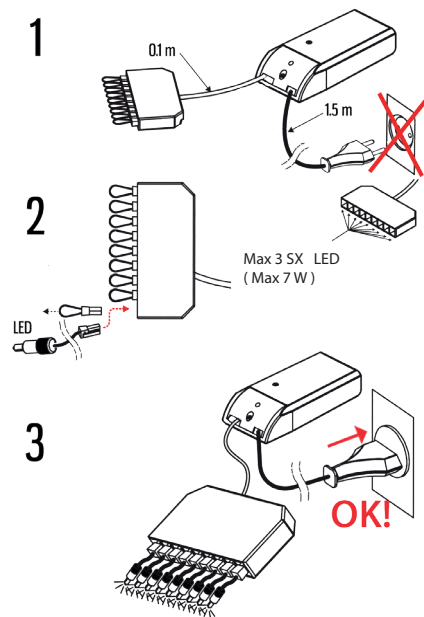

Ambient temperature 0°C ... + 45°C

1532268